

HF75, PF-75 Setting Custom Folds

The fully automatic HF75, PF-75 Automatic Document Folder is the ideal folding solution for any church, school or business that demands quick and easy setup.




Six common folds are pre-set for 11", 14" and 17" (Int'l Sizes A3, B4, A4, B5, A5 & B6) paper and can be activated with the touch of a button. Additionally, up to nine custom folds can be programmed and stored in memory. All the settings are easily made with the centrally located control panel and LED.

Setting Custom Folds

Example 1: Uneven "Z"

1. Measure the length of panel "A".
2. Adjust the upper fold plate so that the stop plate lines up with the measurements of the panel "A" i.e. if panel "A" is 5.25" long slide the stop plate up or down so that it lines up with the 5.25" mark on the fold plate.
3. Measure the length of panel "B".
4. Adjust the lower fold plate so that the stop plate lines up with the measurement of panel "B".
5. Load forms and press test. If folds are too long or too short adjust accordingly.

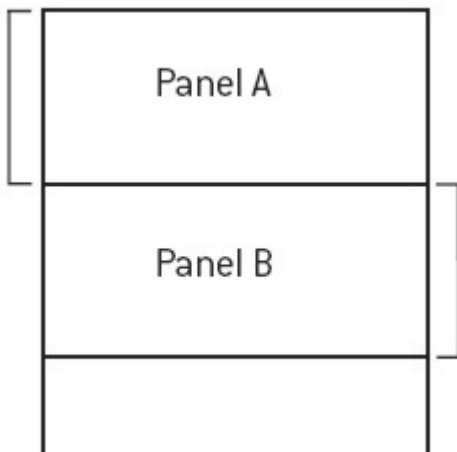

Example 2: Uneven “C”

1. Measure the length of panel “A” & “B”.
 2. Adjust the upper fold plate so that the stop plate lines up with the measurements of panel “A” & “B”. i.e. if panel “A” & “B” are 10”.
- long slide the stop plate up or down so that it lines up with the 10” mark on the fold plate.
3. Measure the length of panel “B”.
 4. Adjust the lower fold plate so that the stop plate lines up with the measurement of panel “B”.
 5. Load forms and press test. If folds are too long or too short adjust accordingly.

